

## Opinion

## Using Remote Fields for Complex Tissue Engineering

James P.K. Armstrong<sup>1,3,\*,@</sup> and Molly M. Stevens<sup>1,2,\*,@</sup>

Great strides have been taken towards the *in vitro* engineering of clinically relevant tissue constructs using the classic triad of cells, materials, and biochemical factors. In this perspective, we highlight ways in which these elements can be manipulated or stimulated using a fourth component: the application of remote fields. This arena has gained great momentum over the last few years, with a recent surge of interest in using magnetic, optical, and acoustic fields to guide the organization of cells, materials, and biochemical factors. We summarize recent developments and trends in this arena and then lay out a series of challenges that we believe, if met, could enable the widespread adoption of remote fields in mainstream tissue engineering.

## The Current Status of Tissue Engineering: Clinical Solutions but Little Structure

Tissue engineers today can draw on a host of new scientific and technological tools, such as cell reprogramming, gene editing, and advanced cell screening [1]. These advances have enabled unprecedented levels of biological control and characterization, however, it is striking to note how the core principles of this discipline have remained largely unchanged from the early tissue engineering experiments carried out by Bell and coworkers in 1979 [2]. In particular, cells, biomaterials, and biochemical factors are still widely held up as the three pillars of tissue engineering. If we set aside certain practical flaws, such as nutrient transport gradients [3], then we can consider most tissue engineering protocols to be equilibrium systems: cells dispersed homogeneously throughout isotropic materials, with nutrients and biochemical factors supplied in a global fashion by bulk diffusion from the surrounding culture medium. The absence of any imposed constraints or directionality means that these strategies generally yield homogeneous tissue constructs that exhibit very little structural organization.

Evidently, this situation is far removed from the vivid complexity of natural systems. Tissues often exhibit multiscale and hierarchical structure, with anisotropic, inhomogeneous, and directional arrangement of both cells and extracellular matrix components. Structural organization is almost always inextricably linked to physiological function, for instance, the anisotropic packing of myofibers ensures directional actuation of skeletal muscle [4], the orientation of cardiomyocytes guides the propagation of contractile waves in myocardial tissue [5], and the zonal organization of cartilage and bone allows effective load transmission across the osteochondral interface [6]. Moreover, it is widely appreciated that tissue grafts engineered with mature vasculature and structural profiles that match the defect site have an improved chance of successful integration and survival [7,8]. It is clear that the functional performance of an engineered tissue graft will be negatively impacted by a failure to address structural complexity. Indeed, it is our view that *in vitro* tissue engineering is unlikely to become established as a mainstream clinical practice without addressing the issue of structural organization.

This point can be illustrated by considering the nature of some of the major tissue engineering products and procedures that have reached the clinic: skin grafts (e.g., Epicel®, Apligraf®,

## Highlights

Remote fields have recently emerged as an alternative to contact force application and microfabrication in the engineering of complex tissue structures.

New methods have been developed that use magnetic fields to manipulate nanoparticles for biochemical patterning, material assembly, and biological actuation.

A series of recent reports in optical manipulation have shown high-level control over gene expression, epigenetics, material degradation, and reversible protein immobilization.

Recent advances have been made in preserving acoustically patterned cell arrays, which have enabled the engineering of skeletal muscle, cardiac, and neural tissue.

<sup>1</sup>Department of Materials, Department of Bioengineering, and Institute for Biomedical Engineering, Imperial College London, London, SW7 2AZ, UK  
<sup>2</sup>[www.stevensgroup.org](http://www.stevensgroup.org)  
<sup>3</sup>[www.linkedin.com/in/james-armstrong-08480048/](http://www.linkedin.com/in/james-armstrong-08480048/)

\*Correspondence:  
[james.armstrong@imperial.ac.uk](mailto:james.armstrong@imperial.ac.uk)  
 (J.P.K. Armstrong) and  
[m.stevens@imperial.ac.uk](mailto:m.stevens@imperial.ac.uk)  
 (M.M. Stevens).

@Twitter: @jrmstrng (J.P.K. Armstrong) and @UKRMP\_Smart (M.M. Stevens).

Dermagraft®), cartilage implants (e.g., MACI®), and corneal sheets (e.g., Holoclar®) [1]. The clinical success of these products is owed to the fact that they can still perform certain functions without possessing optimal tissue structure. Skin grafts can provide a basic physical barrier for patients with burns or ulcers, despite lacking natural features, such as sweat glands. Cellularized implants that fill small articular cartilage defects can improve joint function and relieve pain, despite these constructs lacking the intricate organization of cells and extracellular matrix fibers. Meanwhile, corneal sheets can be used to improve visual acuity in cases of limbal stem cell deficiency, despite the absence of zonal organization. These examples serve as a marker of the current status of tissue engineering: products that offer clinical benefits ‘despite’ a lack of structural organization.

### Next-Generation Tissue Engineering: Building Structural Complexity

Whether we are looking to improve the clinical utility of existing products or seeking translational solutions for more structurally demanding targets (e.g., liver, neural, cardiac tissue), it is critical that the next generation of tissue engineers focus on methods that can fully replicate physiological functions by faithfully recreating native structural complexity. There are a host of fabrication tools that can be used to spatially arrange cells, materials, and biochemical factors. For instance, 3D bioprinting is commonly used to create precision architecture and patterned multicellular structures [9]. Techniques such as aligned electrospinning [10], melt electrospinning writing [11], and unidirectional freeze drying [12] can be used to create anisotropic substrates, while materials can also be molded [13], layered into zonal structures [14], or cast with mechanical, compositional, or morphogen gradients [15]. These fabrication-driven approaches are either used to spatially organize components prior to tissue culture or as a means of creating material or biochemical cues that can drive directional or local cell responses during tissue culture.

An alternative strategy that has been investigated for complex tissue engineering is the use of externally applied forces. For example, electrical or mechanical stimulation can be used to guide cell alignment or differentiation during tissue engineering [16]. These examples use apparatus that directly interface with either the cells, media, or tissue constructs. In this article, we wish to highlight a related strategy that has recently come to prominence: the use of remotely applied **force fields** (see [Glossary](#)) (e.g., optical, acoustic, magnetic) that can be used to guide structural complexity without any tangible contact. While appreciating that these fields can be used to promote bulk effects (e.g., global cell differentiation), we have focused on strategies that seek to disrupt the equilibrium balance of cells, materials, or biochemical factors (Figure 1, Key Figure). In particular, we highlight recent approaches that use remote fields to: (i) spatially assemble different tissue engineering components; (ii) initiate local responses, such as cell differentiation or material degradation; or (iii) exert directional responses, such as cell or matrix fiber alignment.

### Magnetic Fields

Strong magnetic fields have been widely used to orient matrix fibers during gelation, for example, Eguchi and coworkers recently used an 8 T field to fabricate aligned collagen hydrogels that could guide Schwann cell orientation [17] (Figure 2A). However, the recent trend has seen the introduction of magnetically susceptible components that allow alignment using much weaker magnetic fields. For instance, Antman-Passig and coworkers used **superparamagnetic** nanoparticles to guide the alignment of collagen fibers in a 26 mT field [18] (Figure 2B). This aligned system was used for neural cell orientation, while a similar approach was employed by Betsch and coworkers for the 4D bioprinting of cartilage tissue [19]. Meanwhile, magnetic surfactant conjugation has been used to magnetize proteins [20], and superparamagnetic nanoparticles have been used as field-responsive carriers for RNA and proteins [21–23]. The latter approach was used by Li and coworkers to create gradients of bone morphogenetic protein 2 (BMP-2) within cellularized

### Glossary

**Acoustic attenuation:** the loss of energy of a sound wave as it propagates through a medium.

**Acoustic patterning:** the use of sound waves to create pressure gradients that can move particles (or cells) into nodes or antinodes.

**Focused ultrasound:** a technique that uses lenses or curved transducers to create local regions of high intensity sound energy with frequencies greater than 20 kHz.

**Force fields:** vector maps describing the noncontact forces experienced by particles at different spatial coordinates.

**Multiphoton lithography:** a technique that uses a focused laser to drive local changes (e.g., photocrosslinking, photopolymerization, photodegradation) with electronic excitation requiring the near-simultaneous absorption of two or more photons.

**Optical tweezers:** a technique that uses highly focused laser beams to spatially trap and manipulate small particles with a refractive index that is different to the surrounding medium.

**Optoepigenetic:** the use of light to control epigenetic mechanisms, for instance, by using photochromic inhibitors of chromatin-modifying enzymes.

**Optogenetic:** the use of light to modulate molecular events in living cells using genes encoding photoresponsive proteins.

**Paramagnetic:** a class of magnetism in which a material has unpaired electrons that can align with an external magnetic field.


**Superparamagnetic:** a magnetic behavior exhibited by small ferrimagnetic/ferromagnetic materials, which have single magnetic domains that can align with an external magnetic field.

**Transgene expression:** the biosynthesis of functional products (usually proteins) from genes artificially introduced into a cell.

**Ultrasound standing wave:** a sound wave that oscillates with a frequency of more than 20 kHz but has stationary pressure nodes.

## Key Figure

## Remote Fields in Tissue Engineering: Literature Examples and Inspiration

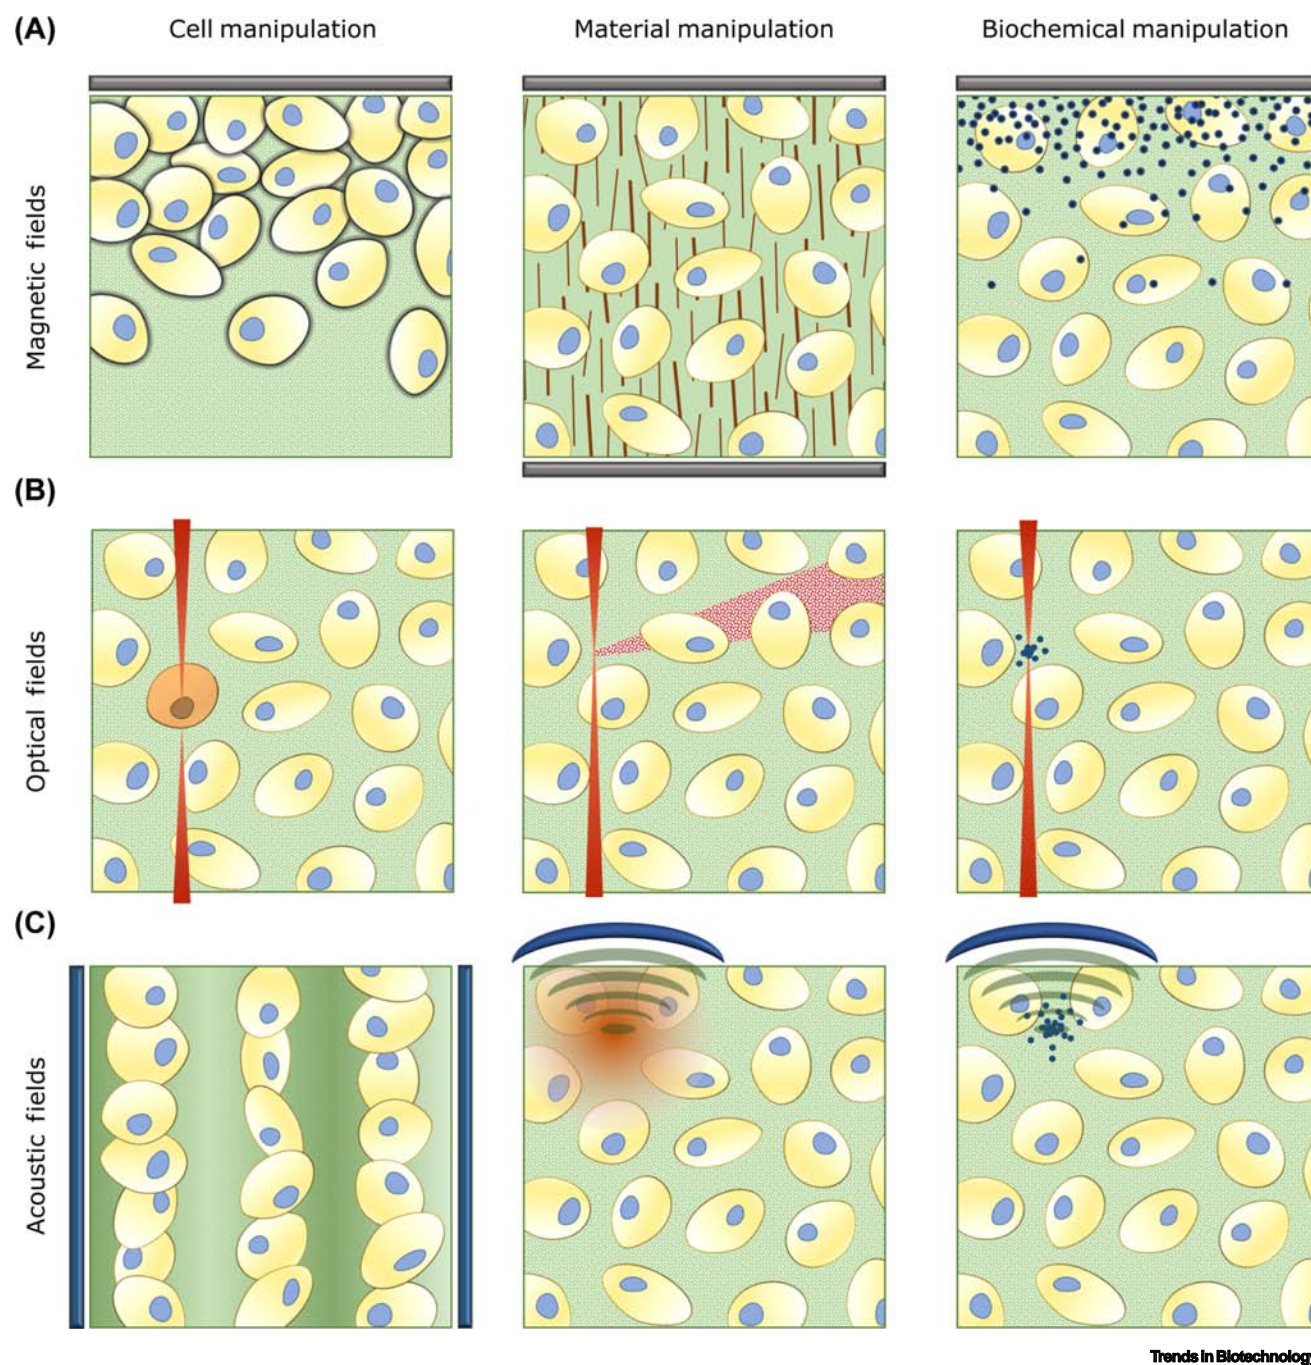

Trends in Biotechnology

(See figure legend at the bottom of the next page.)



hydrogels, in order to promote localized osteogenesis and mineralization during osteochondral tissue engineering [22] (Figure 2C).

An interesting route to cellular manipulation was recently reported by Tasoglu and coworkers, who used external magnetic fields for the levitational self-assembly of cell-seeded materials in a **paramagnetic** suspension [24]. A more common approach is direct cell magnetization, however, this strategy necessitates the use of cytocompatible protocols that can label cells with a large quantity of paramagnetic material [25]. Bulk cell magnetization has been used to engineer vocal folds [26], secretory epithelial organoids [27], and embryoid bodies [28], however, superparamagnetic nanoparticles can also interact with cells in a more refined manner. Historically, superparamagnetic nanoparticles have been targeted to specific integrin receptors or ion channels on the cell membrane surface allowing remote field actuation [29]. More recently, magnetic fields have been used to manipulate the position of functionalized, intracellular superparamagnetic nanoparticles in order to modulate processes such as cytoskeletal assembly, mitochondrial dynamics and gene expression [30–32]. With further development, this method could potentially offer a remotely activated magnetogenetic switch for complex tissue engineering.

### Optical Fields


Tissue engineering components can be manipulated with much higher precision using optical technologies. Light irradiation can be used to form, cleave, or rearrange chemical bonds, a characteristic ideally suited to patterning materials [33]. Historically, simple photomask-based systems have been used to present an uneven distribution of light, however, the recent trend has been towards more dynamic 3D patterning techniques, such as **multiphoton lithography**. This method was used by Arakawa and coworkers to precisely sculpt vascular networks in hydrogels crosslinked with photodegradable peptides [34] (Figure 3A). A similar method was used by DeForest and Tirrell, who used two bio-orthogonal photochemistries to immobilize and release proteins within a synthetic hydrogel (Figure 3B). Applying this approach to vitronectin enabled the reversible and spatiotemporal differentiation of human mesenchymal stem cells [35]. An alternative method is the use of localized heating caused by infrared irradiation to trigger temperature-mediated processes. This strategy was employed by Stowers and coworkers to release liposomal cargo that could either stiffen or soften alginate hydrogels with spatiotemporal control [36].

Local heating by infrared light was also used by Martin-Saavedra and coworkers to spatiotemporally trigger the **transgene expression** of vascular endothelial growth factor (VEGF) [37]. This study used a heat-activated gene switch, however, a more direct method for optically controlling cells is the use of **optogenetic** technology. Indeed, optogenetics has enabled the direct photoactivation of processes such as neurite outgrowth, myogenic differentiation, and angiogenesis [38,39], while Reis and coworkers recently reported that **optoeipigenetic** probes could be used for light-controlled gene expression [40]. While optogenetic/optoeipigenetic tissue engineering requires further development, these reports offer the enticing prospect of using optical switches to guide complex tissue formation. Meanwhile, other light-based technologies have been used to precisely assemble different tissue engineering components. For instance, **optical tweezers** can trap and maneuver individual cells or microtubules into customized arrays [41,42].


---

**Figure 1.** (A) Magnets (shown in gray) offer a relatively simple and accessible method for manipulating the position of magnetized cells [28], aligning matrix fibers [17], or patterning growth factor gradients [22]. (B) Focused optical fields (shown in red) provide high spatial resolution that can be used for optogenetic modulation of cells [40], photodegradation of materials [34], or local release of biochemical factors [35]. (C) Acoustic fields can be generated by piezotransducers (shown in blue) in order to pattern bulk cell populations [45], modulate fiber microstructure [57], or locally release biochemical factors [59]. Many of these approaches, along with related technologies, are already used to engineer complex tissue structures, while others require further development, optimization, or scale up.

---

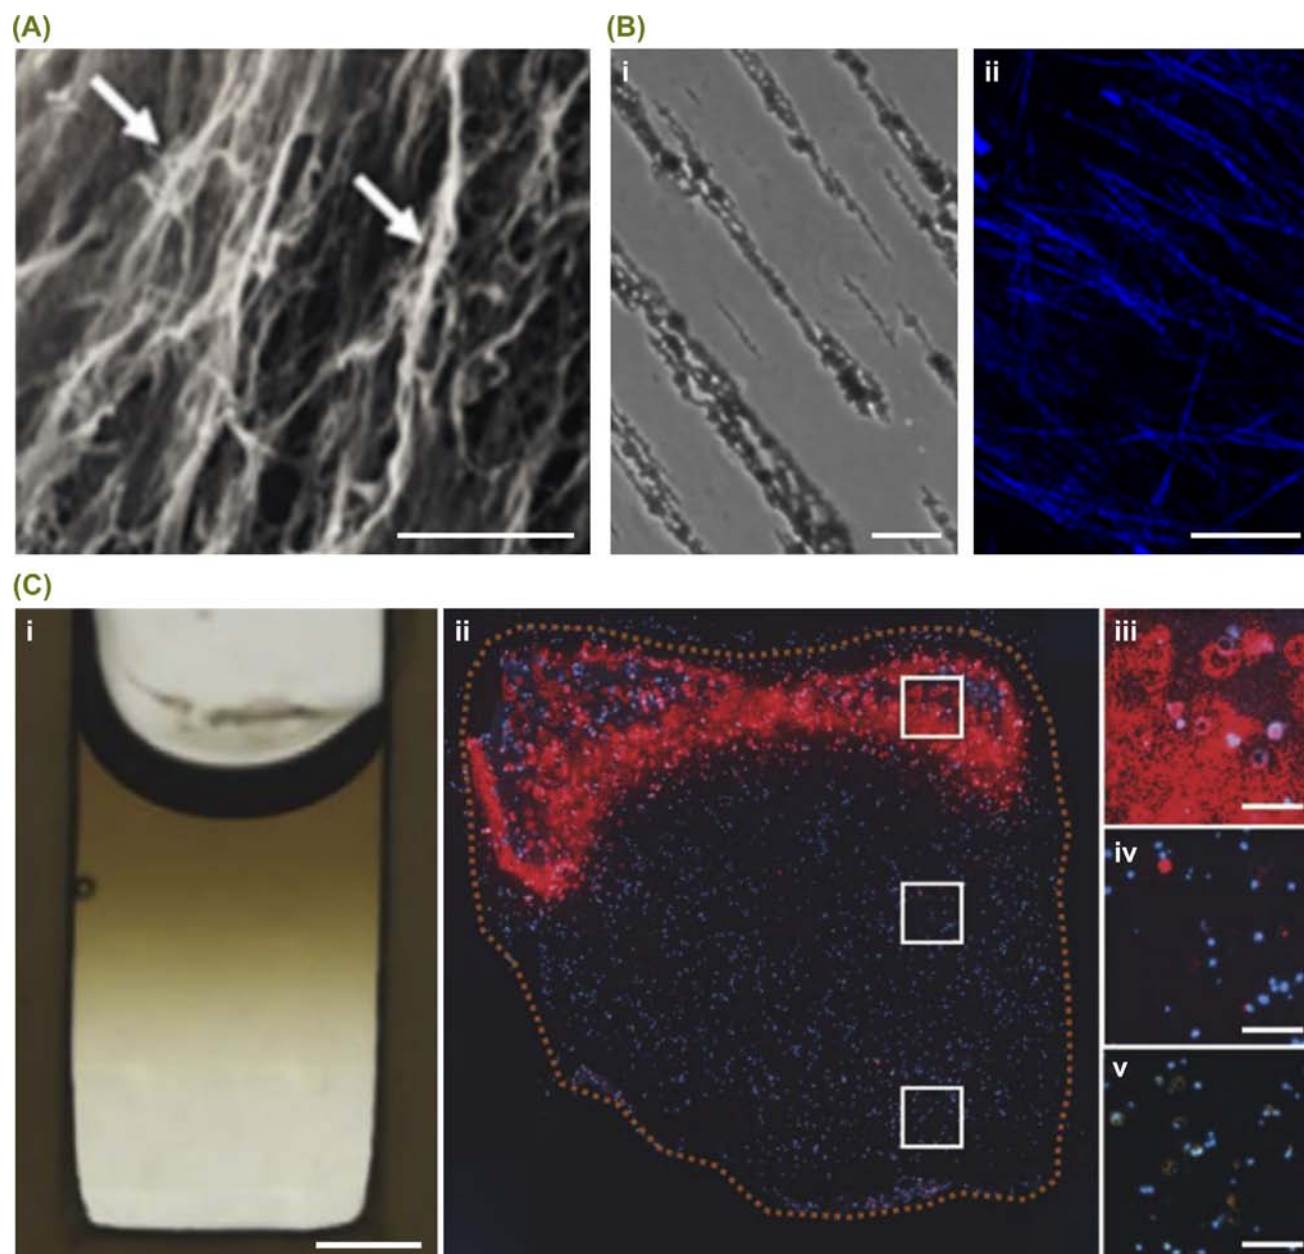**Trends in Biotechnology**


**Figure 2. Magnetic Fields for Manipulating Biomolecules.** Magnetic fields are particularly well suited to the redistribution of nanoscale entities, such as biomolecule aggregates or magnetically susceptible nanoparticles. (A) For example, Eguchi and coworkers recently used an 8 T magnetic field to orient collagen fibers (white arrows) during self-assembly and gelation. Scale bar = 50  $\mu\text{m}$ . The aligned structures were capable of guiding Schwann cell orientation and promoting nerve regeneration in both *in vitro* and *in vivo* models. Reproduced, with permission, from [17]. (B) The addition of superparamagnetic nanoparticles to the hydrogel precursor can allow fiber alignment with much weaker fields. For example, a recent report showed that a 26 mT magnetic field could be used to form hydrogels containing (i) aligned superparamagnetic nanoparticle strings, and (ii) oriented collagen fibers (blue). Scale bars = 50  $\mu\text{m}$ . Reprinted, with permission, from M. Antman-Passig and O. Shefi *et al.* Nano Letters Copyright 2016 American Chemical Society [18]. (C) Superparamagnetic nanoparticles can also be used as field-responsive carriers for biomolecular cargo. (i) For instance, Li and coworkers used a 700 mT magnetic field to form an agarose hydrogel bearing a gradient of superparamagnetic nanoparticles (dark brown). Scale bar = 2 mm. By preloading the nanoparticles with bone morphogenetic protein 2 and co-encapsulating human mesenchymal stem cells into the agarose hydrogel, the gradient was used to engineer osteochondral tissue constructs. Immunostaining for osteopontin (red), counterstained with DAPI (blue) across (ii) the whole construct, (iii) the bone end, (iv) the middle section, and (v) the cartilage end. Scale bars = 200  $\mu\text{m}$ . Reproduced, with permission, from [22].

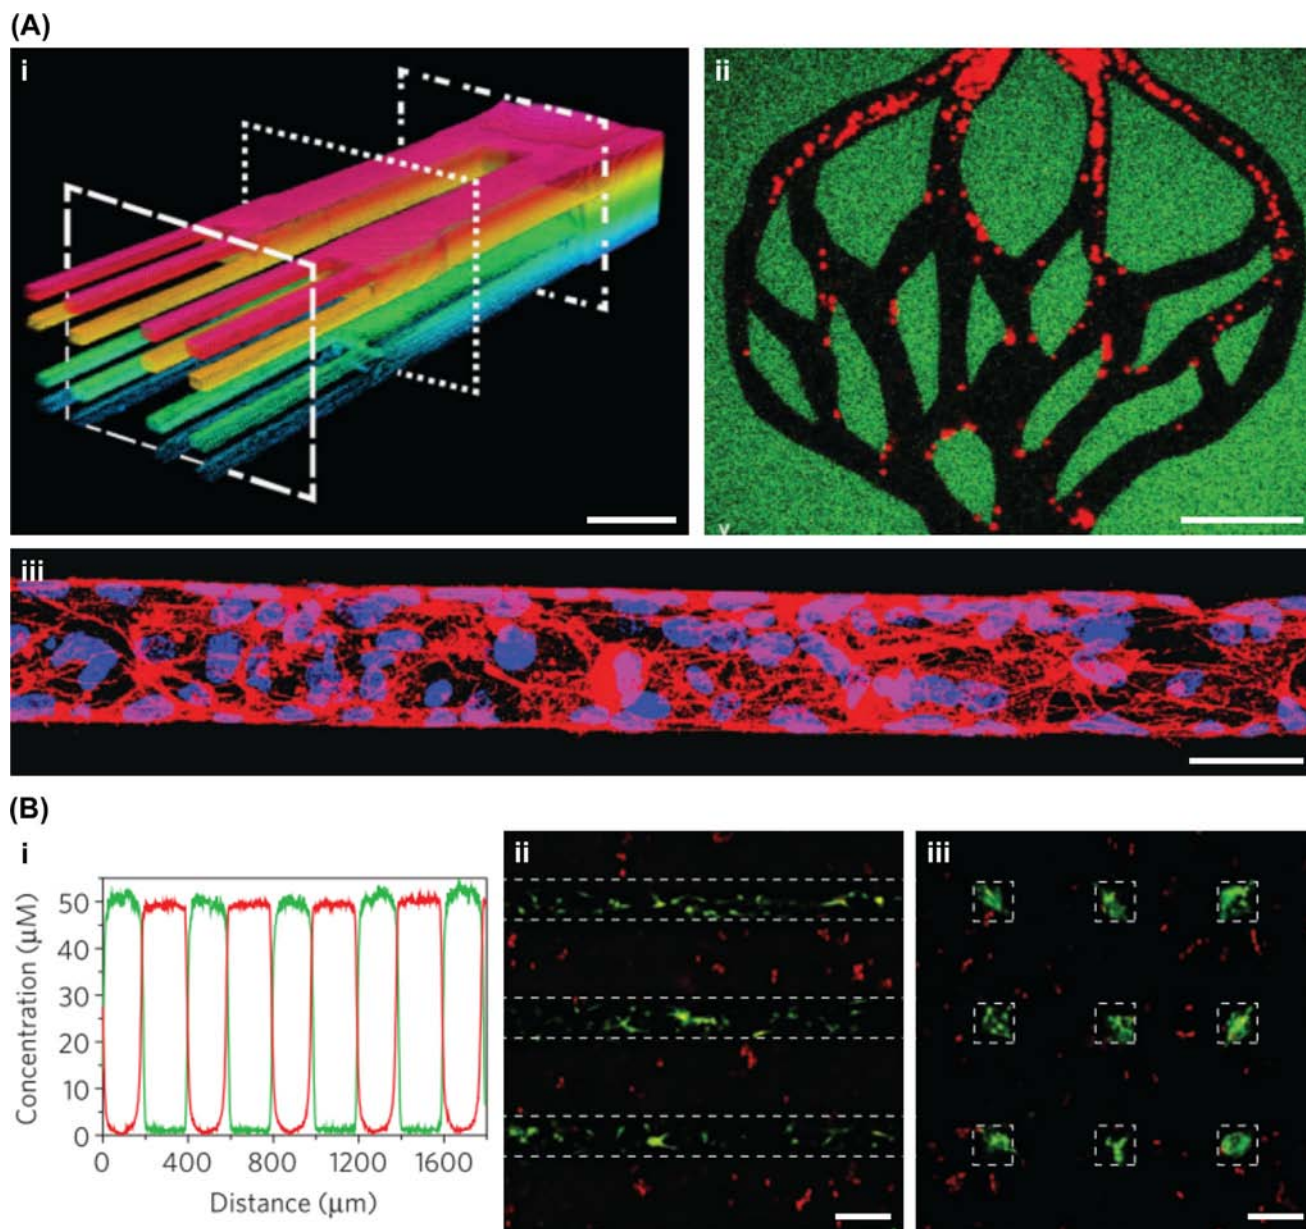

## Trends in Biotechnology

**Figure 3. Optical Fields for Manipulating Materials.** Light can be used for the formation or cleavage of bonds, a property that makes it highly suited to the patterning of material systems. (A) For example, Arakawa and coworkers used a light-mediated subtractive manufacturing technique based on molecular photolysis to create complex 3D networks of perfusable microvessels. The vessels could be perfused with fluorescent microbeads, shown with (i) z-depth-dependent color coding and (ii) as distinct particles (red). Scale bars = 100  $\mu\text{m}$ . (iii) The channels were seeded with endothelial cells to form vascular networks, shown here stained with phalloidin (red) and Hoechst 33342 (blue). Scale bar = 50  $\mu\text{m}$ . Reproduced, with permission, from [34]. (B) DeForest and Tirrell used two different photochemistries: one wavelength to reversibly anchor proteins to the surrounding hydrogel and a second wavelength to remove the immobilized protein. (i) This method was used to sequentially pattern two different proteins (red and green traces) with high precision and minimal overlap. (ii) Immunostaining for osteocalcin (green) counterstained with CellTracker (red) showed osteogenesis of mesenchymal stem cells only in regions of vitronectin patterning (dashed lines), (iii) which could be reversed by selectively removing protein to leave smaller regions of vitronectin (dashed squares). Scale bars = 200  $\mu\text{m}$ . Reproduced, with permission, from [35].



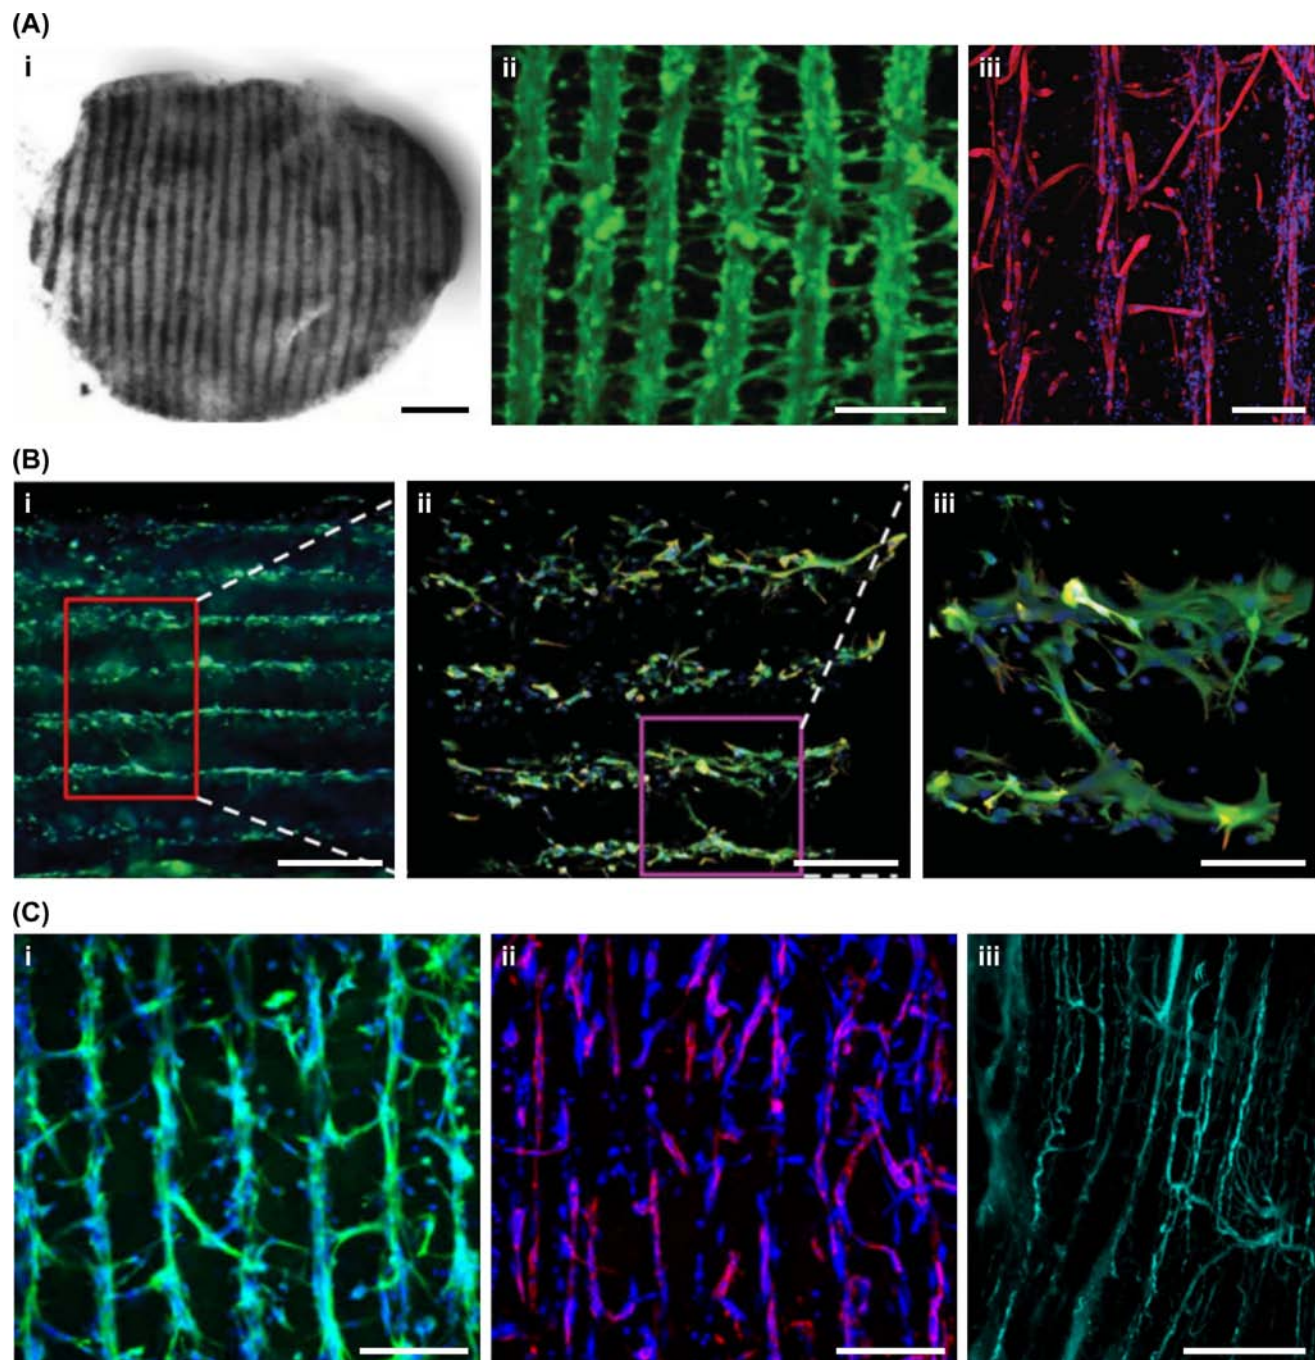

Trends in Biotechnology

**Figure 4. Acoustic Fields for Manipulating Cells.** Ultrasound standing waves are particularly well suited for creating geometric assemblies of microscale entities, which makes them highly applicable to remote cell patterning. (A) For example, Armstrong and coworkers used this approach to pattern myoblasts throughout collagen-based hydrogels for the tissue engineering of aligned skeletal muscle. (i) Low magnification bright field image of a patterned muscle tissue, scale bar = 500  $\mu$ m. (ii) Confocal fluorescence microscopy image of calcein-stained myoblasts (green), scale bar = 200  $\mu$ m. (iii) Confocal fluorescence microscopy image of myotubes immunostained for skeletal myosin (red) and counterstained with DAPI (blue), scale bar = 300  $\mu$ m. Reproduced, with permission, from [45]. (B) Bouyer and coworkers used acoustic levitation to form layers of neuroprogenitors in fibrin hydrogels for neural tissue engineering. Immunostaining for Tuj 1 (green) and nestin (red), counterstained with DAPI

(Figure legend continued at the bottom of the next page.)

Although optical tweezers offer extremely high spatial precision, it is clear that significant improvements in throughput are required if this method is to be applied to the engineering of full-size tissue constructs.

### Acoustic Fields

A more high-throughput method for cell manipulation is **acoustic patterning**. This method typically uses one or more **ultrasound standing waves** to create uneven pressure fields that can pattern cells *en masse* into well-defined geometric assemblies [43]. Early work in this field focused on patterning cells on 2D culture substrates, however, a major development in this area was the use of hydrogelation to encapsulate the patterned cell arrays [44]. This method allowed cell arrays to be preserved for long-term *in vitro* tissue engineering after removal of the acoustic field. Since 2016, devices have been developed to generate lines of myoblasts for skeletal muscle tissue engineering [45] (Figure 4A), assemblies of beating cardiomyocytes for cardiac tissue engineering [46,47], levitated sheets of neuroprogenitors for neural tissue engineering [48] (Figure 4B) and arrays of endothelial cells for neovascularization [49,50] (Figure 4C). These examples use simple geometric arrays to create lines, columns, or sheets, however, in the future it may be possible to create customized tissue architecture by employing more flexible holographic assembly routes [51,52].

A limitation to acoustic cell patterning is that the forces generated are relatively weak [53]. As a result, acoustic patterning can be readily disrupted by factors such as mechanical agitation, thermal currents, acoustic streaming, viscosity, and gravity [54]. Moreover, the forces used for patterning are proportional to the object volume and thus it can be extremely challenging to pattern nanoscale entities, such as biochemical factors or matrix fibers. This limitation has led to the development of strategies that use microscale carriers to host biomolecular cargo or template material fabrication [55,56]. An alternative approach is the use of **focused ultrasound** that can provide highly localized stimuli capable of modulating different tissue engineering components. The local heating caused by focused ultrasound has been used to modulate fibril size during collagen gelation [57] and trigger the transgene expression of growth factors (BMP-2 and VEGF) in a spatially controlled manner [58]. Focused ultrasound can also be used to initiate non-thermal effects, such as the liberation of growth factors from acoustically responsive droplets or scaffolds [59,60].

### Concluding Remarks and Future Perspectives

It is evident that remote field systems have the potential to greatly advance *in vitro* tissue engineering. However, the convergence of magnetic, optical, and acoustic technologies with *in vitro* tissue engineering is a relatively new development and, as a result, many studies exist only in the academic sphere and are far from disrupting the clinical *status quo*. Here, we propose three key challenges that must be addressed in order to realize the benefit of remote fields in translational tissue engineering (see Outstanding Questions). First, it is imperative that ‘proof-of-concept’ studies using arbitrary feature dimensions and model cell types are replaced with methods that enable the engineering of mature, multicellular tissues with native structural dimensions. For instance, while ultrasound standing waves have been used to create multilayer sheets of endothelial cells in collagen hydrogels [44], the next step for this technology is the creation of functional networks

### Outstanding Questions

Can we progress from ‘proof-of-concept’ studies towards the engineering of clinically relevant tissues with native multicellularity and natural feature dimensions?

Can we avoid a reliance on customized systems and instead develop methods that employ materials capable of supporting both structural organization and tissue development?

Can we move away from specialized techniques towards more accessible technologies, in order to allow adoption of remote fields in mainstream tissue engineering?

(blue), (i) scale bar = 500  $\mu\text{m}$ , (ii) scale bar = 250  $\mu\text{m}$ , (iii) scale bar = 100  $\mu\text{m}$ . Reproduced, with permission, from [48]. (C) Kang and coworkers used two orthogonal standing waves to create 3D arrays of collateral cylindroids containing both endothelial cells and adipose stem cells. (i) Immunostaining for vascular endothelial cadherin (green) counterstained with DAPI (blue), scale bar = 200  $\mu\text{m}$ . (ii) Immunostaining for  $\alpha$  smooth muscle actin (red) counterstained with DAPI (blue), scale bar = 200  $\mu\text{m}$ . (iii) Image of aligned vessels, perfused with fluorescent dextran (green), 1 week after subcutaneous transplantation, scale bar = 200  $\mu\text{m}$ . Reproduced, with permission, from [50].



of blood vessels, replete with support cells (e.g., smooth muscle cells), formed not in a bare hydrogel but in a real tissue structure (e.g., muscle, bone, liver).

The second challenge is to use materials and protocols that support remote manipulation without affecting other aspects of the engineered tissue. This statement is made in light of the fact that many remote field technologies necessitate the use materials with defined properties: certain levels of optical transparency, viscosity, magnetic susceptibility, photoresponsivity, or **acoustic attenuation**. As a result, many strategies rely on either: (i) a customized material, designed and synthesized with the appropriate set of characteristics; or (ii) the selection of an existing material system that has compatible properties within an operational parameter space. While a carefully designed or selected material can evidently be used to enable remote organization of structural features, this benefit must not be at the expense of the biological, physical, and mechanical properties required to support cell survival, differentiation, and extracellular matrix production. Ideally, a tissue engineering protocol that is recognized as the academic or clinical gold standard would be used with remote field application as the sole change to the established procedure.

The final challenge is to improve the accessibility of remote field instrumentation. Apparatus is often assembled in house [45,55], however, the need for users to assemble and operate their own devices restricts usage to a small number of groups with specialist expertise. This situation could be alleviated by more active dissemination of academic knowledge through protocols and methods papers, or by making devices available through user collaboration or product commercialization. Alternatively, many remote field technologies use high-end equipment that is already commercially available, such as multiphoton lithography [35], optical tweezers [41], or focused ultrasound systems [60]. These systems, which can require considerable expense and expertise to operate and maintain, tend to be sold as multifunctional apparatus rather than tailored to particular end-user applications. Therefore, a major challenge can be tuning and integrating commercial apparatus to meet biological requirements (cytocompatibility, sterility, etc.). Overall, the creation of more integrated, accessible technologies would enable research groups around the world to embrace remote fields as a mainstream tool for complex tissue engineering.

### Acknowledgments

J.P.K.A. was funded by the Medical Research Council (MR/S00551X/1). M.M.S. acknowledges support from the grant from the UK Regenerative Medicine Platform 'Acellular / Smart Materials – 3D Architecture' (MR/R015651/1), the European Research Council (ERC) Seventh Framework Programme Consolidator grant 'Naturale CG' (616417), the Rosetrees Trust, and the Wellcome Trust Senior Investigator Award (098411/Z/12/Z). The authors would also like to acknowledge Chunching Li and Valeria Nele for their insight and edits.

### Disclaimer Statement

No competing financial interests exist.

### References

1. Armstrong, J.P.K. and Stevens, M.M. (2019) Emerging technologies for tissue engineering: from gene editing to personalized medicine. *Tissue Eng. Part A* 25, 688–692
2. Bell, E. *et al.* (1979) Production of a tissue-like structure by contraction of collagen lattices by human fibroblasts of different proliferative potential *in vitro*. *Proc. Natl. Acad. Sci. U. S. A.* 76, 1274–1278
3. Armstrong, J.P.K. *et al.* (2015) Artificial membrane binding proteins stimulate oxygenation of stem cells during tissue engineering of large cartilage constructs. *Nat. Commun.* 6, 7405
4. Frontera, W.R. and Ochala, J. (2015) Skeletal muscle: a brief review of structure and function. *Calcif. Tissue Int.* 96, 183–195
5. Nitsan, I. *et al.* (2016) Mechanical communication in cardiac cell synchronized beating. *Nat. Phys.* 12, 472–478
6. Bergholt, M.S. *et al.* (2016) Raman spectroscopy reveals new insights into the zonal organization of native and tissue-engineered articular cartilage. *ACS Cent. Sci.* 2, 885–895
7. Ben-Shaul, S. *et al.* (2019) Mature vessel networks in engineered tissue promote graft – host anastomosis and prevent graft thrombosis. *Proc. Natl. Acad. Sci. U. S. A.* 116, 2955–2960
8. Patel, S. *et al.* (2018) Integrating soft and hard tissues via interface tissue engineering. *J. Orthop. Res.* 36, 1069–1077

9. Graham, A.D. *et al.* (2017) High-resolution patterned cellular constructs by droplet-based 3D printing. *Sci. Rep.* 7, 7004
10. Xia, H. *et al.* (2016) Oriented growth of rat Schwann cells on aligned electrospun poly(methyl methacrylate) nanofibers. *J. Neurol. Sci.* 369, 88–95
11. Castilho, M. *et al.* (2017) Melt electrospinning writing of poly-hydroxymethylglycolide-co-ε-caprolactone-based scaffolds for cardiac tissue engineering. *Adv. Healthc. Mater.* 6, 1700311
12. Wang, D. *et al.* (2015) Highly flexible silica/chitosan hybrid scaffolds with oriented pores for tissue regeneration. *J. Mater. Chem. B* 3, 7560–7576
13. Wang, X.-Y. *et al.* (2014) Engineering interconnected 3D vascular networks in hydrogels using molded sodium alginate lattice as the sacrificial template. *Lab Chip* 14, 2709–2716
14. Steele, J.A.M. *et al.* (2014) Combinatorial scaffold morphologies for zonal articular cartilage engineering. *Acta Biomater.* 10, 2065–2075
15. Li, C. *et al.* (2019) Buoyancy-driven gradients for biomaterial fabrication and tissue engineering. *Adv. Mater.* 31, 1900291
16. Rangarajan, S. *et al.* (2014) Use of flow, electrical, and mechanical stimulation to promote engineering of striated muscles. *Ann. Biomed. Eng.* 42, 1391–1405
17. Eguchi, Y. *et al.* (2015) Effectiveness of magnetically aligned collagen for neural regeneration *in vitro* and *in vivo*. *Bioelectromagnetics* 36, 233–243
18. Antman-Passig, M. and Shefi, O. (2016) Remote magnetic orientation of 3D collagen hydrogels for directed neuronal regeneration. *Nano Lett.* 16, 2567–2573
19. Betsch, M. *et al.* (2018) Incorporating 4D into bioprinting: real-time magnetically directed collagen fiber alignment for generating complex multilayered tissues. *Adv. Healthc. Mater.* 7, 1800894
20. Brown, P. *et al.* (2012) Magnetizing DNA and proteins using responsive surfactants. *Adv. Mater.* 24, 6244–6247
21. Cruz-Acuna, M. *et al.* (2018) Magnetic nanoparticles loaded with functional RNA nanoparticles. *Nanoscale* 10, 17761–17770
22. Li, C. *et al.* (2018) Glycosylated superparamagnetic nanoparticle gradients for osteochondral tissue engineering. *Biomaterials* 176, 24–33
23. Zhang, W. *et al.* (2017) Magnetically controlled growth-factor-immobilized multilayer cell sheets for complex tissue regeneration. *Adv. Mater.* 29, 1703795
24. Tasoglu, S. *et al.* (2015) Magnetic levitational assembly for living material fabrication. *Adv. Healthc. Mater.* 4, 1469–1476
25. Correia Carreira, S. *et al.* (2016) Ultra-fast stem cell labelling using cationised magnetoferritin. *Nanoscale* 8, 7474–7483
26. Pöttler, M. *et al.* (2019) Magnetic tissue engineering of the vocal fold using superparamagnetic iron oxide nanoparticles. *Tissue Eng. Part A* Published online May 2, 2019. <https://doi.org/10.1089/ten.TEA.2019.0009>
27. Adine, C. *et al.* (2018) Engineering innervated secretory epithelial organoids by magnetic three-dimensional bioprinting for stimulating epithelial growth in salivary glands. *Biomaterials* 180, 52–66
28. Du, V. *et al.* (2017) A 3D magnetic tissue stretcher for remote mechanical control of embryonic stem cell differentiation. *Nat. Commun.* 8, 400
29. Dobson, J. (2008) Remote control of cellular behaviour with magnetic nanoparticles. *Nat. Nanotechnol.* 3, 139–143
30. Etoc, F. *et al.* (2013) Subcellular control of Rac-GTPase signalling by magnetogenetic manipulation inside living cells. *Nat. Nanotechnol.* 8, 193–198
31. Stanley, S.A. *et al.* (2015) Remote regulation of glucose homeostasis in mice using genetically encoded nanoparticles. *Nat. Med.* 21, 92–98
32. Liße, D. *et al.* (2017) Engineered ferritin for magnetogenetic manipulation of proteins and organelles inside living cells. *Adv. Mater.* 29, 1700189
33. Ruskowitz, E.R. and DeForest, C.A. (2018) Photoresponsive biomaterials for targeted drug delivery and 4D cell culture. *Nat. Rev. Mater.* 3, 17087
34. Arakawa, C.K. *et al.* (2017) Multicellular vascularized engineered tissues through user-programmable biomaterial photodegradation. *Adv. Mater.* 29, 1703156
35. DeForest, C.A. and Tirrell, D.A. (2015) A photoreversible protein-patterning approach for guiding stem cell fate in three-dimensional gels. *Nat. Mater.* 14, 523–531
36. Stowers, R.S. *et al.* (2015) Dynamic phototuning of 3D hydrogel stiffness. *Proc. Natl. Acad. Sci. U. S. A.* 112, 1953–1958
37. Martin-Saavedra, F.M. *et al.* (2014) Temporal and spatial patterning of transgene expression by near-infrared irradiation. *Biomaterials* 35, 8134–8143
38. Park, S. *et al.* (2015) Optogenetic control of nerve growth. *Sci. Rep.* 5, 9669
39. Polstein, L.R. *et al.* (2017) An engineered optogenetic switch for spatiotemporal control of gene expression, cell differentiation, and tissue morphogenesis. *ACS Synth. Biol.* 6, 2003–2013
40. Reis, S.A. *et al.* (2016) Light-controlled modulation of gene expression by chemical optoepigenetic probes. *Nat. Chem. Biol.* 12, 317–323
41. Kirkham, G.R. *et al.* (2015) Precision assembly of complex cellular microenvironments using holographic optical tweezers. *Sci. Rep.* 5, 8577
42. Bergman, J. *et al.* (2015) Constructing 3D microtubule networks using holographic optical trapping. *Sci. Rep.* 5, 18085
43. Marx, V. (2015) Biophysics: using sound to move cells. *Nat. Methods* 12, 41–44
44. Garvin, K.A. *et al.* (2011) Vascularization of three-dimensional collagen hydrogels using ultrasound standing wave fields. *Ultrasound Med. Biol.* 37, 1253–1264
45. Armstrong, J.P.K. *et al.* (2018) Engineering anisotropic muscle tissue using acoustic cell patterning. *Adv. Mater.* 30, 1802649
46. Naseer, S.M. *et al.* (2017) Surface acoustic waves induced micropatterning of cells in gelatin methacryloyl (GelMA) hydrogels. *Biofabrication* 9, 015020
47. Serpooshan, V. *et al.* (2017) Bioacoustic-enabled patterning of human iPSC-derived cardiomyocytes into 3D cardiac tissue. *Biomaterials* 131, 47–57
48. Bouyer, C. *et al.* (2016) A bio-acoustic levitational (BAL) assembly method for engineering of multilayered, 3D brain-like constructs, using human embryonic stem cell derived neuroprogenitors. *Adv. Mater.* 28, 161–167
49. Comeau, E.S. *et al.* (2017) Ultrasound patterning technologies for studying vascular morphogenesis in 3D. *J. Cell Sci.* 130, 232–242
50. Kang, B. *et al.* (2019) High-resolution acoustophoretic 3D cell patterning to construct functional collateral cylindroids for ischemia therapy. *Nat. Commun.* 9, 5402
51. Marzo, A. *et al.* (2015) Holographic acoustic elements for manipulation of levitated objects. *Nat. Commun.* 6, 8661
52. Melde, K. *et al.* (2016) Holograms for acoustics. *Nature* 537, 518–522
53. Bassindale, P.G. *et al.* (2014) Measurements of the force fields within an acoustic standing wave using holographic optical tweezers. *Appl. Phys. Lett.* 104, 163504
54. Armstrong, J.P.K. *et al.* (2019) Spatiotemporal quantification of acoustic cell patterning using Voronoi tessellation. *Lab Chip* 19, 562–573
55. Nichols, M.K. *et al.* (2018) Fabrication of micropatterned dipeptide hydrogels by acoustic trapping of stimulus-responsive coacervate droplets. *Small* 14, 1800739
56. Melde, K. *et al.* (2018) Acoustic fabrication via the assembly and fusion of particles. *Adv. Mater.* 30, 1704507
57. Garvin, K.A. *et al.* (2013) Controlling collagen fiber microstructure in three-dimensional hydrogels using ultrasound. *J. Acoust. Soc. Am.* 134, 1491–1502
58. Wilson, C.G. *et al.* (2014) Patterning expression of regenerative growth factors using high intensity focused ultrasound. *Tissue Eng. Part C* 20, 769–779
59. Fabiilli, M.L. *et al.* (2013) Acoustic droplet-hydrogel composites for spatial and temporal control of growth factor delivery and scaffold stiffness. *Acta Biomater.* 9, 7399–7409
60. Moncion, A. *et al.* (2017) Controlled release of basic fibroblast growth factor for angiogenesis using acoustically-responsive scaffolds. *Biomaterials* 140, 26–36